


# PASS™ System Wiring Harness

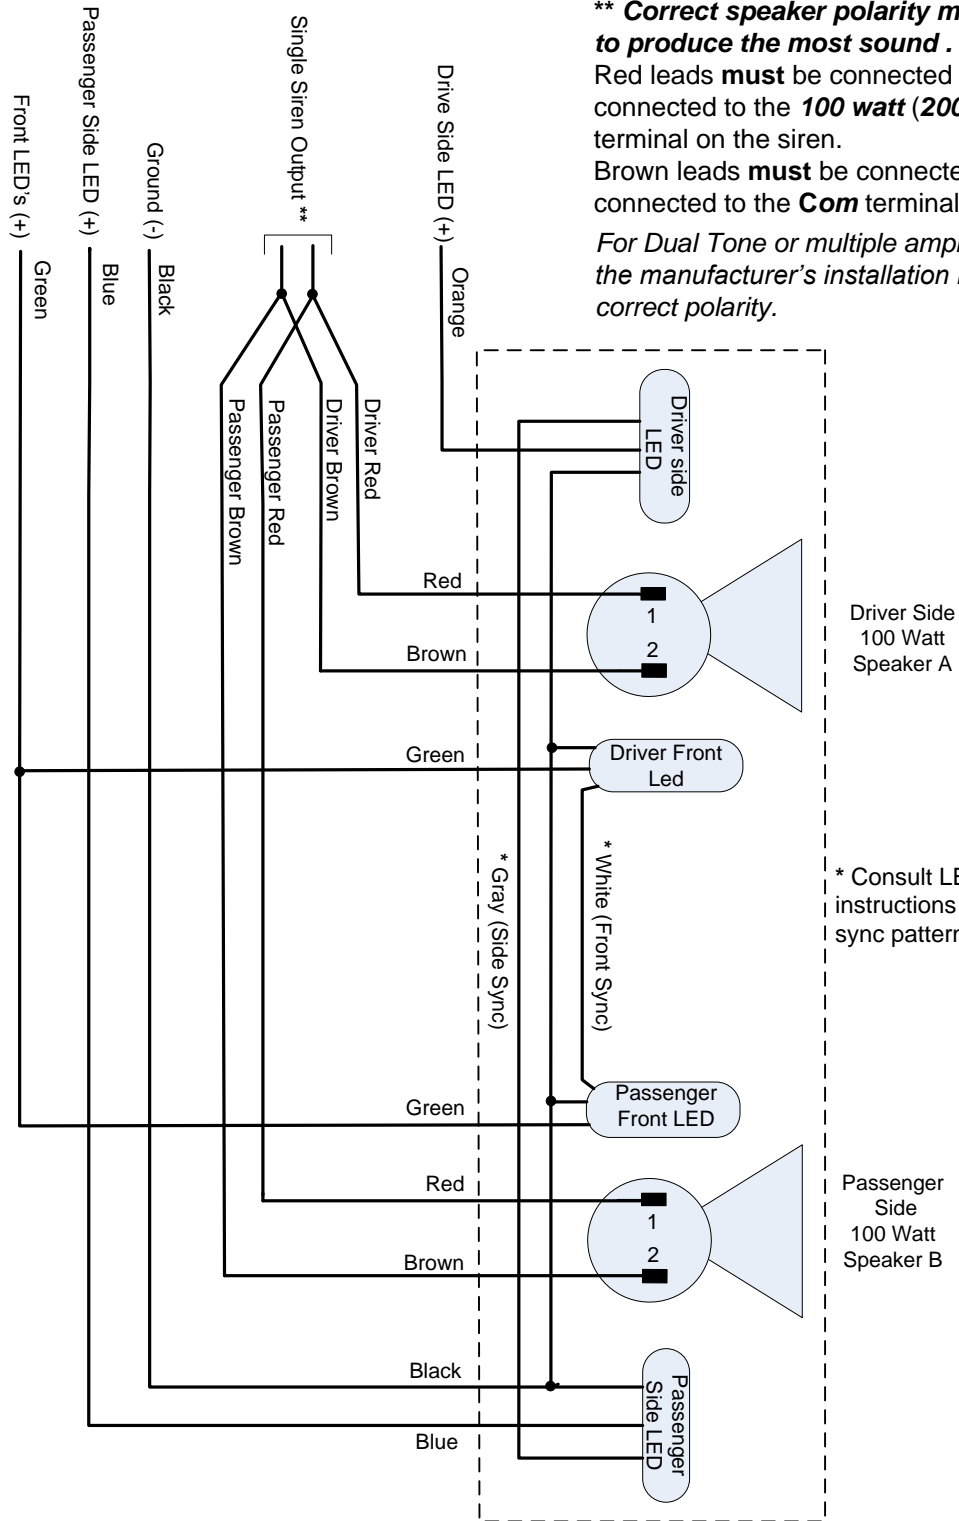

**\*\* Correct speaker polarity must be maintained to produce the most sound .**

Red leads **must** be connected together and then connected to the **100 watt (200 watt if available)** terminal on the siren.

Brown leads **must** be connected together and then connected to the **Com** terminal on the siren.

*For Dual Tone or multiple amplifier Sirens consult the manufacturer's installation manual to maintain correct polarity.*

\* Consult LED Installation instructions to change flash & sync pattern



303 MESSNER DR. • WHEELING, IL • 60090  
 847-459-1460 • FAX 847-459-1569  
 WWW.LUND-INDUSTRIES.COM