




---

3175 MacARTHUR BLVD. • NORTHBROOK, IL • 60062  
847-459-1460 • FAX 847-714-9443  
www.lund-industries.com  
www.data-carts.com

---

## SS-GM2-FPI-S Back Seat Stand-Alone Dual Gun Rack for Ford Interceptor Sedan

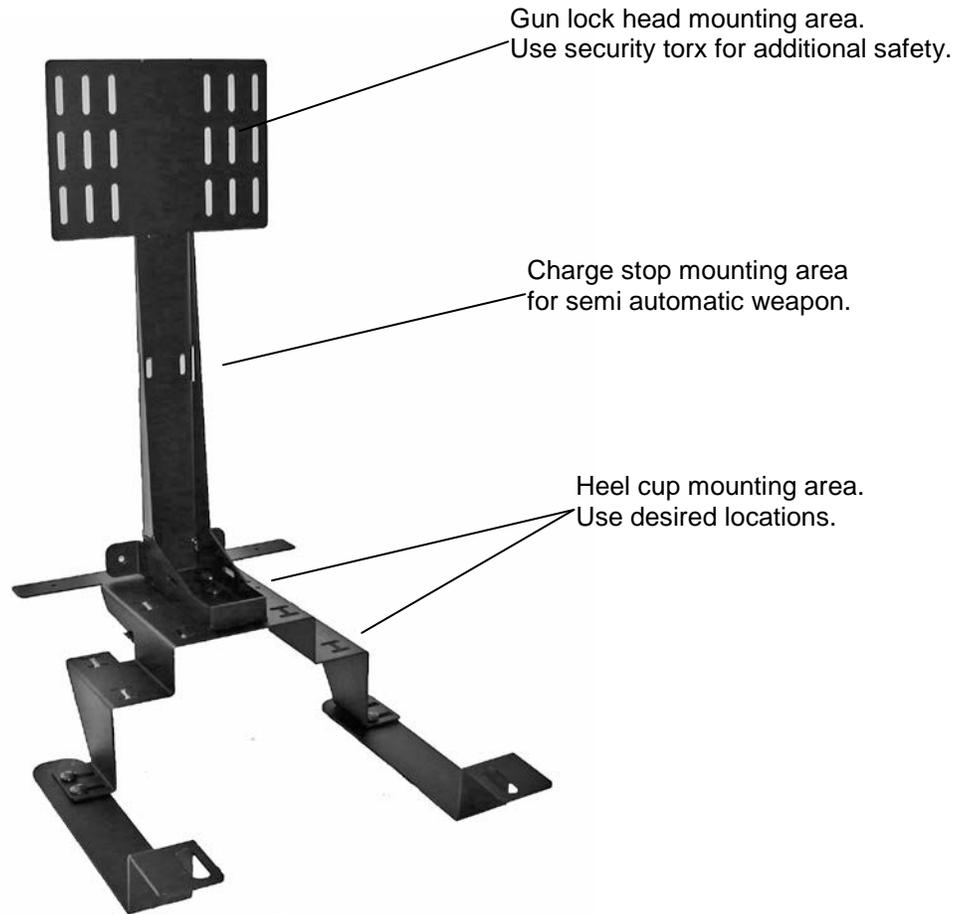

1. Remove bottom of rear seat and set aside.
2. Move passenger and driver seat all the way forward to gain access to seat bolts.
3. Remove plastic seat rail trim, (2 per seat).
4. Completely remove the (2) factory bolts from each seat.
5. Attach the mount legs to the gun rack base using 3/8" carriage bolts and flange nuts, (leave loose for later adjustment).
6. Attach the gun rack upright with supplied 3/8" carriage bolts. Fully tighten securely
7. Tilt each seat forward by applying pressure to head rest to raise the factory seat rails. This allows the mount legs to slide under factory rails.




Mounting bracket  
installed under driver  
side seat rail

View from rear seat area

8. Be certain that the front mount leg slot fits over the factory seat rail location pin located underneath each factory seat rail (see above photo).

9. Loosely attach the factory bolts back into the passenger and driver seat rails.

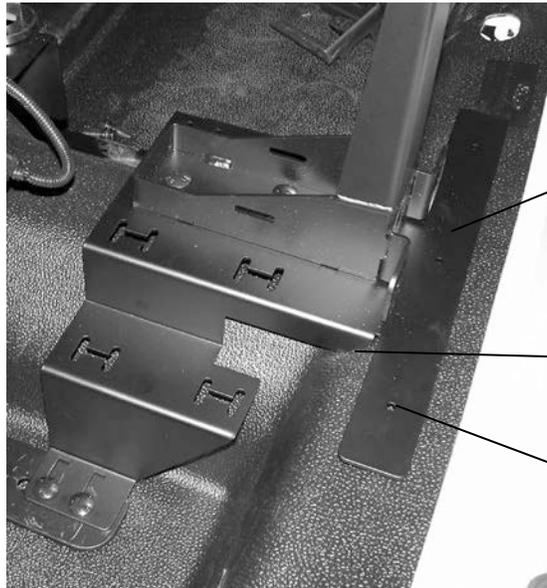

**IMPORTANT:**  
Position gun rack base  
so that mounting flange  
is flat against rear seat  
floor surface

Factory seat edge

Sheet metal screw  
mounting hole

10 . Move the gun rack base so it is just in front of the factory seat edge.

11. Once the gun rack is aligned, check underneath vehicle to be certain there are no obstructions where the (3) supplied sheet metal screws will be attached. Install sheet metal screws.

12. After securing the base of the gun rack securely tighten the remainder of hardware.

13. Adjust the gun heel cups and locks to the desired location.