



303 MESSNER DR. • WHEELING, IL • 60090
847-459-1460 • FAX 847-459-1569
WWW.LUND-INDUSTRIES.COM

ULTP5

Universal Laptop Computer Mount

Rev 03/12


ULTP5 Universal Laptop Computer Mount will accommodate computers 10.62" to 16.50" in width, 9.00" to 12.00" in depth and up to 1.50" thick.

ULTP5 does offer Tall Side Clips, which will accommodate computers up to 2.00" thick & Zero Edge Side Clips for keyboards keys that go right to the edge of the laptop (both sets are sold separately).

The ULTP5 hold-down clips and key lock are designed to securely hold the laptop in the mount and deter theft, not prevent it.

Lund Industries Inc. recommends taking your laptop out of the vehicle when not in use.

9/64" Hex (Allen) wrench is needed to adjust clip location and position. 7/16" Wrench or Socket is needed to attach Lund Industries Clevis (TS-1; TS-60; TS-90). #2 Phillips screw driver and a 9/64" Hex (Allen) wrench are needed to mount accessories.

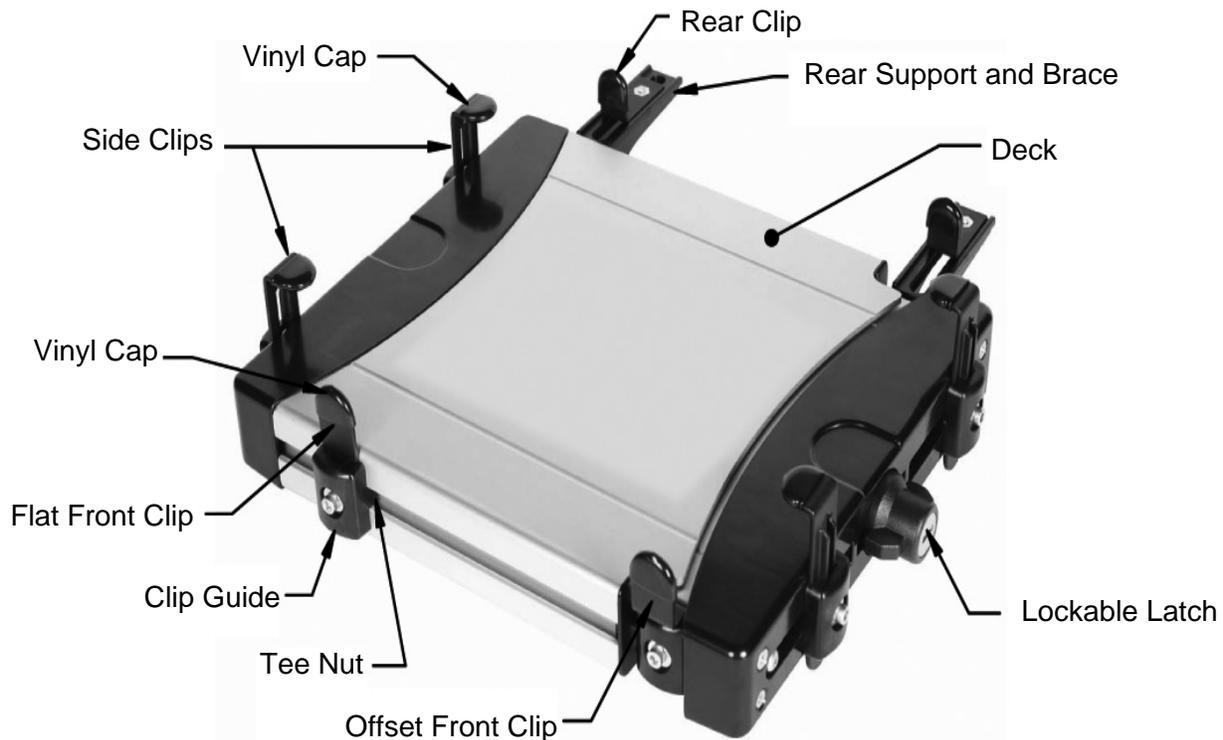

Product Mounting Disclaimer

Lund Industries, Inc. is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Lund Industries, Inc. products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Lund Industries, Inc. specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Lund Industries, Inc. product instruction sheets.

If you need assistance or have questions, call Lund Industries Inc. at 1-800-504-1460

Specialists in Emergency Vehicle Products Since 1978 Design, Manufacturing, Distribution & Installation

Rear Support Assembly

Two Rear Support Clips must be assembled at the time of installation. Attach each Support Bracket to Tee Nut located in channel on back edge of ULTP5 using a #8-32 x 3/8" Socket Head Screw. Attach the Rear Clip to the Support Bracket with a #8 external tooth washer and a #8-32 x 5/16" Nylon Patch Socket Head Screw.




#8-32 x 3/8" Socket Head Screw

#8 External Tooth Washer &
#8-32 x 5/16" Nylon Patch Socket Head Screw

Vehicle Mounting

The ULTP5 cradle is designed to be used with Lund Industries clevis, poles and vehicle bases. The Sliding Mount Bar feature allows side-to-side adjustment of cradle to desired mounting position. Four 1/4" Flat Washers and 1/4-20 x 5/8" long Hex Head Screws are supplied in the hardware bag to secure motion attachments to the bottom side of the cradle.

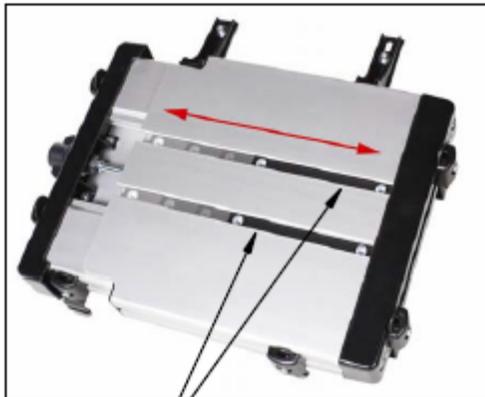

Sliding Mount Bars on Bottom Surface



1/4-20 x 5/8" Hex Head Screws
& 1/4 Flat Washers

If you need assistance or have questions, call Lund Industries Inc. at 1-800-504-1460

Specialists in Emergency Vehicle Products Since 1978 Design, Manufacturing, Distribution & Installation

Adjusting ULTP5 for computer

If the latch on ULTP5 is locked, unlock the unit with the supplied keys. All ULTP5's are keyed alike. Unlatch by turning the lock body clockwise 90 degrees.

Pull the lock side of the ULTP5 to the right to open the deck.

Loosen adjustment screws securing front clips, rear clips and side clips enough to raise them and move them in the slots.

Eight Vinyl Caps are included in hardware bag to place over clips to protect computer if needed. (Zero Edge Side Clips, are used without caps)



Place the computer on the ULTP5 deck. Slide the computer tight against the Front Clips. The Front Clips can be adjusted side-to-side and also have a slight amount of vertical adjustment. The Flat and Offset clips may also swap positions, with the offset clip overlapping the fixed deck to accommodate shorter depth computers.

Slide the computer against the Side Clips on the fixed deck. Adjust the Side Clips side-to-side to avoid any needed ports and lower them so the tab will just clear the top of the computer and tighten. A snug fit is preferred.

Push the right side of the ULTP5 in until the right Side Clips touch the computer. Adjust the right Side Clips in the same manner as the left side.

After pushing the unit together, (compressing the computer between the side clips) turn the lock body 90 degrees counter-clockwise to secure the unit.

Adjust the Rear Supports side-to-side and tighten. Adjust the Rear Clips to prevent the computer from moving back and tighten.

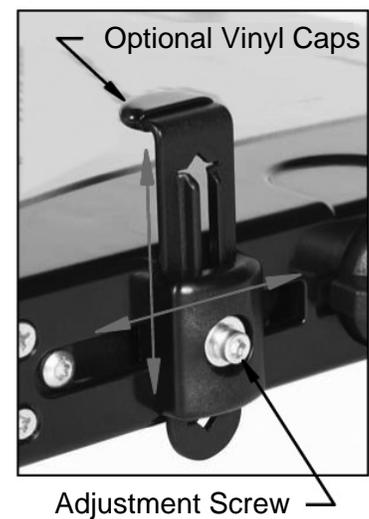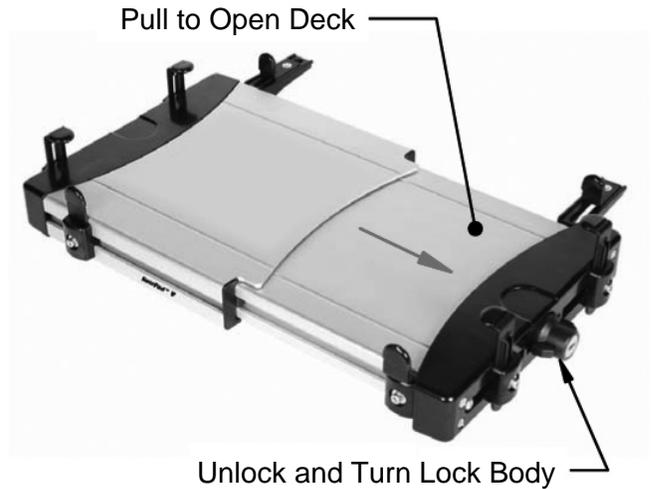

If you need assistance or have questions, call Lund Industries Inc. at 1-800-504-1460

Specialists in Emergency Vehicle Products Since 1978 Design, Manufacturing, Distribution & Installation