

VPB-QD Quick Disconnect Bracket Install Instructions




CAUTION: Always check before drilling or screwing to be certain not to hit anything (fuel tank, lines, wiring, etc) beneath the carpet, the transmission hump or under the vehicle.

1: Position the mounting bracket in the vehicle and mount in the desired position using user supplied hardware.

2: Position the VPB-814D / FMPB-814D pistol box over the mounting bracket so that the "D" handle fits into the slots in the mounting bracket.

3: Secure the pistol box to bracket using the supplied knurled knob.

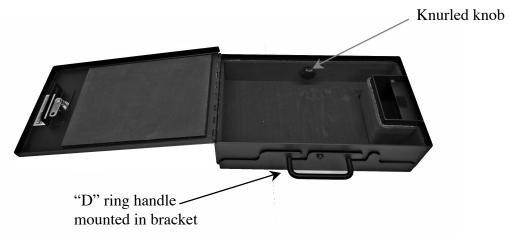

Optional: VPB-QD mounting bracket with universal floor mount brackets. (for FMPB-814D Floor Mounted Pistol Box only)

Attach mounting legs to VPB-QD quick disconnect bracket as required and mount to vehicle seat rails.

